Whirlpool Gold® GU3100XTV

KEY FEATURES

- Meets ADA requirements for installation under a 34" counter
- Super Capacity (Tall Tub) with Stainless Steel Interior
- Electronic Controls
- High-Temp Wash Option
- 56 dBA's
- Upper & Lower Nylon Racks

COLORS

White(Q) Black(B) Black on Stainless Steel(S)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

®ENERGY STAR is a U.S. Registered Mark.

Dishwasher Features & Specifications

	Whirlpool Gold®
Model No.	**GU3100XTV**
Capacity	Super
Washing System	
ENERGY STAR® Qualification	Yes
Tub Size	Tall Tub — Stainless
Wash System	2 Wash Arms
Water Wash Level	5
Water Feed System	Direct
Automatic Temperature Control	Yes
Controls	
Control System	Electronic
Cycles	5
Pots & Pans	Yes
Heavy	Yes
Normal	Yes
Light/China	Light
Rinse Only	Yes
Options	4
High-Temp Wash†	Yes
Drying	No Heated Dry
Delay Wash	2/4/6-Hour
Control Lock	Yes
Racks	
Coating	Nylon
Silverware/Utensil Baskets	
Silverware Basket	In the Rack

† High-Temp Wash maintains 145˚F in the main wash when selected, while High-Temp Boost increases the amount of time the heat is on in the wash and rinse cycles.

Optional Accessories

	Part #
Floor Mounting Kit	8171477
6' Reinforced braid dishwasher hook up kit (no cord), 6-ft braided water supply line, teflon tape, strain relief bracket, wire caps, 3/8 brass compression fitting with elbow and in-line tee	4396897RP
6' Reinforced braid dishwasher hose w/ 90 degree fitting, is a 6-ft braided water supply line and 3/8 compression fitting with elbow fits most major dishwasher brands, supplies water to dishwasher	4396897RW
6' Reinforced braid dishwasher hook up kit (with 4' cord), this kit includes a 6-ft braided water supply line, 6-ft power cord, teflon tape, strain relief bracket, wire caps, 3/8 brass compression	8212488RC
12' Reinforced braid dishwasher hose w/ 90 degree fitting, is a 12-ft braided water supply line that supplies water to dishwasher	8212486
5' Power cord, 3-prong, dishwasher, the power cord kit includes a 3-prong, 5' long power cord, instruction sheet, and all other necessary parts for complete installation.	4317824

Product Dimensions

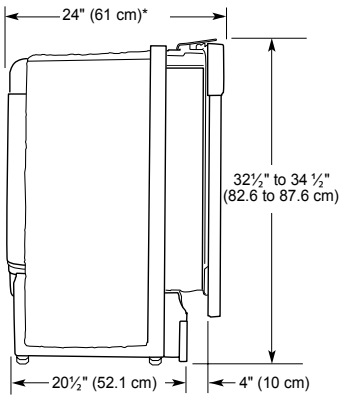

* To front of door frame

Cut-Out Dimensions

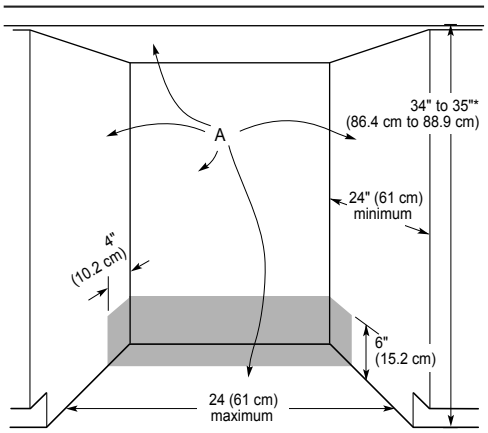

A. All surfaces free from intrusions

* Underside of countertop to floor

NOTES:

- Cut holes in shaded area of cabinet walls or floor for plumbing and electrical service.
- ADA installation—32½" (82.5 cm) beneath 34" (86.4 cm) high countertops may be accomplished by adjusting the toekick and leveling legs.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.